




**NTN 6915ZZ deep groove ball bearings**

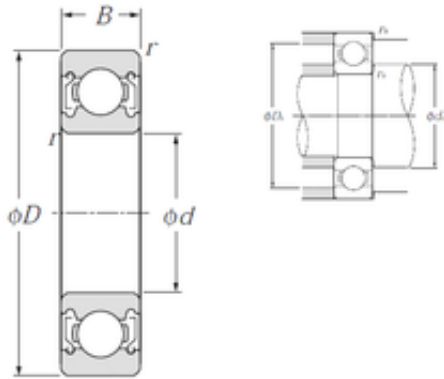

Bearing No. 6915ZZ

6915ZZ Bearing 2D drawings and 3D CAD models

Size	75x105x16 mm
Bore Diameter	75 mm
Outer Diameter	105 mm
Width	16 mm
d	75 mm
D	105 mm
B	16 mm
C	16 mm
rn	0,5 mm
r min.	1 mm
da min.	80 mm
da max	82,5 mm
Da max.	100 mm
ra max.	1 mm
Weight	0,353 Kg
Basic dynamic load rating (C)	24,4 kN
Basic static load rating (C0)	22,6 kN
(Grease) Lubrication Speed	6 100 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
Product Group	B00308
Enclosure	2 Metal Shields
Precision Class	ABEC 1   ISO P0



## EAO Bearing Machine Development Co., Ltd

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	75MM Bore; 105MM Outside Diameter; 16MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste
Other Features	Deep Groove   Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Outside Diameter	4.134 Inch   105 Millimeter
Bore	2.953 Inch   75 Millimeter
Outer Race Width	0.63 Inch   16 Millimeter
Inner Race Width	0 Inch   0 Millimeter
bore diameter:	75 mm
static load capacity:	22600 N
outside diameter:	105 mm
precision rating:	ISO Class 0
overall width:	16 mm



## EAO Bearing Machine Development Co., Ltd

finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Shielded
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	16 mm
snap ring included:	Without Snap Ring
outer ring width:	16 mm
internal clearance:	CN
maximum rpm (grease):	6100 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	1 mm
dynamic load capacity:	24400 N
manufacturer product page:	<a href="#">Click here</a>